

PARTNERSITE

WORKSITE LIGHTING



Portable lighting stands
for construction industry
2016 / 2017 CATALOGUE





Partnersite introduces modern and energy-saving solutions onto the market to ensure appropriate workstation illumination at building sites and in workshops.

The company's aim is to improve the working conditions of employees, to increase the effectiveness of tasks performed and to allow for working at times when existing lighting becomes insufficient.

The most important features of our products:


- Energy saving
- Reliability
- Mobility

Lighting stand

PARTNERSITE LED SMD

Construction series

- The product is dedicated for construction companies that need to light a building site for a long time
- Durable and robust structure
- Heavy duty stand with zink coated parts
- Simple system of setting up and folding the stand
- Self-locking nuts were used
- Handles for lifting the main beam by two persons.
- Stand legs have an anchoring hole.
- Floodlights have a broad field of LED distribution to eliminate glare effect
- Warranty 3 years
- Flood lights with IP 65
- Color temperature 6000 K, cool white
- Color rendering >80 RA
- With long 5-metre cable

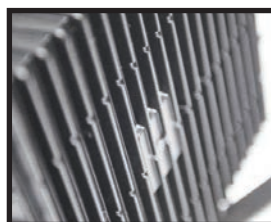

Conditions of use on a stable surface

- The device can be used safely with full anchoring in wind that does not exceed 14 m/s
- The device can be used safely with full anchoring and guy wires in wind that does not exceed 18 m/s
- The device can be used safely without anchoring in wind that does not exceed 6 m/s

Conditions of use on a soft surface

- The main beam is set on the surface; the side legs stabilize the stand




| Model | LM2x50C | LM2x100C | LM2x150C |
|-----------------------------|----------------|----------------|----------------|
| Article number | 16033 | 16031 | 16017 |
| Power [W] | 100 | 200 | 300 |
| Efficiency [Lm] | 9000 | 16400 | 31000 |
| LED diod quantity | 2x240 | 2x240 | 2x240 |
| Dimensions [mm] | 2 x 308*250*72 | 2 x 308*250*72 | 2 x 308*250*72 |
| Cable lenght [m] | 5 | 5 | 5 |
| Stand hight [m] | 3 | 4 | 4,2 |
| Lighting coverage [m2] | 300 | 500 | 700 |
| Stand weight [kg] | 19 | 24 | 35 |
| Beam and lights weight [kg] | 12 | 14 | 17 |
| IP | IP 54 | IP 54 | IP 54 |
| Net price (EUR) | 450,00 | 550,00 | 680,00 |

Lighting stand

PARTNERSITE LED SMD LM50R / LM100R

Rental series

- The stand is both lightweight and durable
- The floodlight has a special protective grill that protects the glass against breaking
- The illuminator housing has the level of impermeability of IP 65
- Floodlights have a broad field of LED distribution offering very advantageous lighting effect
- The stand has double-leg reinforcement and wider spacing between the legs (1.4m) ensuring higher stability
- Warranty 3 years
- Lifespan 50.000 hours
- Color temperature 6000 K, cool white
- Color rendering >80 RA

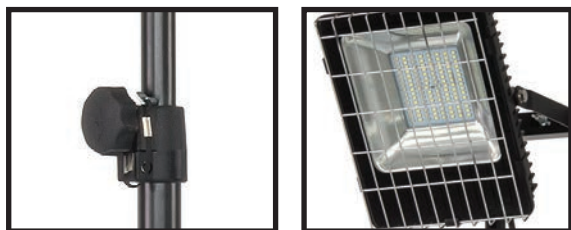

| Model | LM50R | LM100R |
|-----------------------------|---------------|---------------|
| Article number | 16003 | 16004 |
| Power [W] | 50 | 100 |
| Efficiency [Lm] | 4500 | 8200 |
| LED diod quantity | 120 | 240 |
| Cable length [m] | 5 | 5 |
| Stand height [m] | 2,5 | 2,5 |
| Lighting coverage [m2] | 150 | 200 |
| Stand weight [kg] | 7 | 7 |
| Beam and lights weight [kg] | 3 | 3,5 |
| IP | IP 54 | IP 54 |
| Net price (EUR) | 126,00 | 180,00 |

Lighting stand

PARTNERSITE LED SMD LM2x50R

Rental series

- The stand has double-leg reinforcement and wider spacing between the legs (1.4m) ensuring higher stability
- The floodlight has a special protective grill that protects the glass against breaking
- The stand is both lightweight and durable
- Floodlights have a broad field of LED distribution offering very advantageous lighting effect
- The illuminator housing has the level of impermeability of IP 65
- Warranty 3 years
- Lifespan 50.000 hours
- Color temperature 6000 K, cool white
- Color rendering >80 RA



| Model | LM2x50R |
|-----------------------------|----------------|
| Article number | 16005 |
| Power [W] | 100 |
| Efficiency [Lm] | 8200 |
| LED diod quantity | 2x120 |
| Cable lenght [m] | 5 |
| Stand hight [m] | 2,5 |
| Lighting coverage [m2] | 250 |
| Stand weight [kg] | 7 |
| Beam and lights weight [kg] | 8 |
| IP | IP 54 |
| Net price (EUR) | 235,00 |

Lighting stand

PARTNERSITE LED SMD LM2x100R

Rental series with winch

- Reinforced legs with expansion up to 1,8m
- Two protections against uncontrolled lowering: blocking knob and clamping bolt
- The floodlight has a special protective grill that protects the glass against breaking
- The stand is both lightweight and durable
- Floodlights have a broad field of LED distribution offering very advantageous lighting effect
- The illuminator housing has the level of impermeability of IP 65
- Warranty 3 years
- Lifespan 50.000 hours
- Color temperature 6000 K, cool white
- Color rendering >80 RA
- A winch allows operator to easily raise or lower the tower as needed




| Model | LM2x100R |
|-----------------------------|-----------------|
| Article number | 16006 |
| Power [W] | 200 |
| Efficiency [Lm] | 16400 |
| LED diod quantity | 2x240 |
| Cable length [m] | 5 |
| Dimensions [mm] | 2 x 308*250*72 |
| Stand height [m] | 4 |
| Lighting coverage [m2] | 500 |
| Stand weight [kg] | 24 |
| Beam and lights weight [kg] | 10 |
| IP | IP 54 |
| Net price (EUR) | 540,00 |

Lighting stand

PARTNERSITE LED SMD LM3x100R, LM4x100R

Rental series with winch

- A heavy duty stand made of strenghtened steel
- Installed ratchet lock protects fixed equipment against uncontrolled falling down and damage
- The stand has double-leg reinforcement and wider spacing between the legs (1.8m)
- Protective grills that protects the glass against breaking
- Floodlights with IP 65

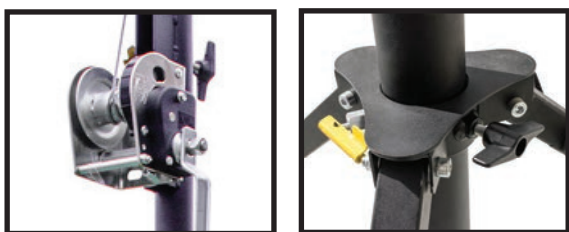

| Model | LM3x100R | LM4x100R |
|-----------------------------|-----------------|-----------------|
| Article number | 16032 | 16033 |
| Power [W] | 300 | 400 |
| Efficiency [Lm] | 24600 | 32100 |
| LED diod quantity | 3x240 | 4x240 |
| Cable lenght [m] | 5 | 5 |
| Dimensions [mm] | 3 x 308*250*72 | 4 x 308*250*72 |
| Stand hight [m] | 4 | 4 |
| Lighting coverage [m2] | 700 | 1000 |
| Stand weight [kg] | 29 | 29 |
| Beam and lights weight [kg] | 14 | 18 |
| IP | IP 54 | IP 54 |
| Net price (EUR) | 810,00 | 950,00 |

Flood light on tray with magnets

PARTNERSITE LED SMD

Workshop series

- Tray with magnetic brackets for safe attachment of the lamp to all metal surfaces
- A highly durable plexiglas panel is much less susceptible to mechanical damage than glass
- Resistance of IK 10 in accordance with the PL-EN 50102 Standard at 20 J
- Thick metal tray with holes that allow for taking off and lifting the lamp
- The floodlight is equipped with a mounting bracket, which allows for the adjustment of the beam angle.
- Floodlights with IP 65
- Warranty 3 years
- Lifespan 15.000 hours
- Color temperature 6000 K, cool white
- Color rendering >80 RA



| Model | LS20A | LS50A | LS50AM |
|------------------------|--------------|--------------|---------------|
| Article number | 16024 | 16025 | 16028 |
| Power [W] | 20 | 50 | 50 |
| Efficiency [Lm] | 1800 | 4500 | 4500 |
| LED diod quantity | 48 | 120 | 120 |
| Cable lenght [m] | 5 | 5 | 5 |
| Dimensions [mm] | 300*200*100 | 500*300*150 | 500*300*150 |
| IP | IP 54 | IP 54 | IP 54 |
| Net price (EUR) | 47,00 | 75,00 | 62,00 |

Rechargeable flood light

PARTNERSITE LED SMD

Workshop series

- Consistently use for 5 hours
- Equipped with car charger and normal charger
- Lifespan 15.000 hours
- Color temperature 6000 K, cool white



Scaffold bracket for handrails as an accessory.

| Model | LSR20A |
|------------------------|---------------|
| Article number | 16034 |
| Power [W] | 20 |
| Efficiency [Lm] | 1800 |
| LED diod quantity | 48 |
| Dimensions [mm] | 268*190*295 |
| IP | IP 65 |
| Net price (EUR) | 47,00 |

Floodlights

PARTNERSITE LED SMD

Floodlights with 5 m cable

- Floodlights with IP 65
- Warranty 3 years
- Color temperature 6000 K, cool white
- Color rendering >80 RA
- With long 5-metre cable



| Model | LLC020A | LLC050A | LLS050AK | LLS100AK | LMS050R | LMS100R |
|------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Article number | 16021 | 16022 | 16026 | 16027 | 16013 | 16014 |
| Power [W] | 20 | 50 | 50 | 100 | 50 | 100 |
| Efficiency [Lm] | 1800 | 4500 | 4500 | 8200 | 4500 | 8200 |
| LED diod quantity | 48 | 120 | 120 | 240 | 120 | 240 |
| Cable length [m] | 5 | 5 | 5 | 5 | 5 | 5 |
| Dimensions [mm] | 199*197*72 | 302*295*77 | 292*238*58 | 308*250*72 | 292*238*58 | 308*250*72 |
| IP | IP 54 | IP 54 | IP 54 | IP 54 | IP 54 | IP 54 |
| Net price (EUR) | 27,00 | 40,00 | 50,00 | 87,00 | 62,00 | 95,00 |

Floodlights

PARTNERSITE LED SMD LLS020A, LLS050A, LLS100A, LLS150A

- Lifespan 50.000 hours
- Warranty 3 years
- Floodlights with IP 65
- Color temperature 6000 K, cool white
- Color rendering >80 RA
- With long 5-metre cable

Floodlights have a broad field of LED distribution offering very advantageous lighting properties, which are much more efficient than the central LED arrangement with a reflector.

Such an LED system decreases the impression of dazzling and ensures better light distribution, thanks to which the room or area are evenly lit within the full range of the lighting angle.



| Model | LLS020A | LLS050A | LLS100A | LLS150A |
|--------------------|--------------|--------------|--------------|----------------|
| Article number | 16008 | 16009 | 16010 | 16011 |
| Power [W] | 20 | 50 | 100 | 150 |
| Efficiency [Lm] | 1800 | 4500 | 8200 | 15660 |
| LED diod quantity | 48 | 120 | 240 | 336 |
| Dimensions [mm] | 185*152*55 | 292*238*58 | 308*250*72 | 4 IP 65*335*86 |
| IP | IP 65 | IP 65 | IP 65 | IP 65 |
| Price [EUR] | 22,00 | 43,00 | 80,00 | 133,00 |

Lighting stand

PARTNERSITE LED LM20A

- Compact stand and a very efficient LED SMD floodlight
- Perfectly meets the needs of electricians, plumbers, fitters while performing work at a client's location
- A highly durable plexiglass panel is much less susceptible to mechanical damage than glass
- Lifespan 15.000 hours
- Warranty 3 years
- Flood lights with IP 65
- Color temperature 6000 K, cool white
- Color rendering >80 RA
- With long 5-metre cable




Model

LM20A

| | |
|------------------------|--------------|
| Article number | 16001 |
| Power [W] | 20 |
| Efficiency [Lm] | 1800 |
| LED diod quantity | 48 |
| Cable lenght [m] | 5 |
| Dimensions [mm] | 199*197*72 |
| Lighting coverage [m2] | 20 |
| IP | IP 54 |
| Net price (EUR) | 49,00 |

The festoon kit LF22M600A

- The festoon kit for lighting areas such as staircases or building structure areas
- The H05VVf 22 m cable with 10 bulb sockets with an industrial plug
- 10 bulb protectors
- Warranty 2 years
- Equipped with 3m cable extender

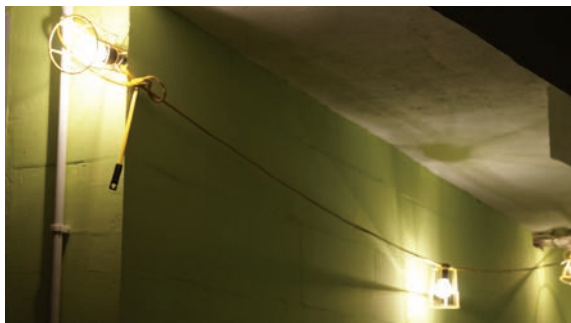

| Model | LF22M600A |
|------------------------|--------------|
| Article number | 16105 |
| Power [W] | 600 |
| Cable length [m] | 5 |
| Lighting coverage [m2] | 300 |
| Dimensions [mm] | 310x260x210 |
| Total weight [kg] | 3,5 |
| IP | IP 54 |
| Net price (EUR) | 82,00 |



Partnersite Sp. z o.o.

ul. Kopanina 28/32, lok. 133a
60-105 Poznań
Tel. +48 505 383 892

www.partnersite.eu
info@partnersite.eu